AUTOCLAVE



◆LCD display
◆Optional printer
◆B&D.Test and vacuum test procedures
◆Pressure overload protection
◆Over heat protection


Top open type water tank


Built-in thermal printer


Easy drain valve


Resistance to corrosion

◆Volume:12、16、18、23、29liter
◆Pulsating vacuum,vacuum up to -80kpa
◆Error code to display the alarm and show the error information
◆Built in water level sensor.Automatic alarm when water shortage or full.
◆Sterilization of surgical instruments, dental instruments, injection equipment and other medical devices that can withstand pressure steam.



Real-time measured values

Shows real-time values for temperature & pressure & time &working state

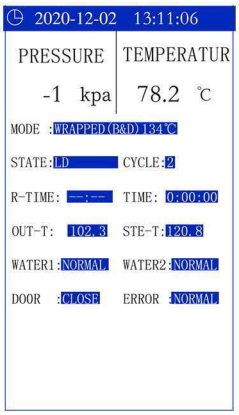

Cycle parameters

Parameter setting for temperature ,sterilization time and drying time

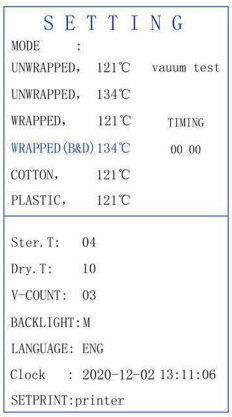

Clear interface

A user-friendly 4buttons keypad enables the user to easily browse through the sterilization cycle program settings and user directories.

AUTOCLAVE

PARAMETER

Volume	Voltage	Chamber Size	OutsideSize	Packing Size	Weight
29l	220V/50HZ OR 110V/60HZ	Φ250*600MM	82*44*40CM	95*58*52CM	56/70KG
23l		Φ246*450MM	68*44*40CM	76*50*45CM	49/57KG
18l		Φ246*350MM	58*44*40CM	67*50*45CM	44/52KG
16l		Φ230*360MM	58*44*40CM	67*50*45CM	42/51KG
12l		Φ200*360MM	58*44*40CM	67*50*45CM	41/50KG

Three times pulsating vacuum sterilization chart

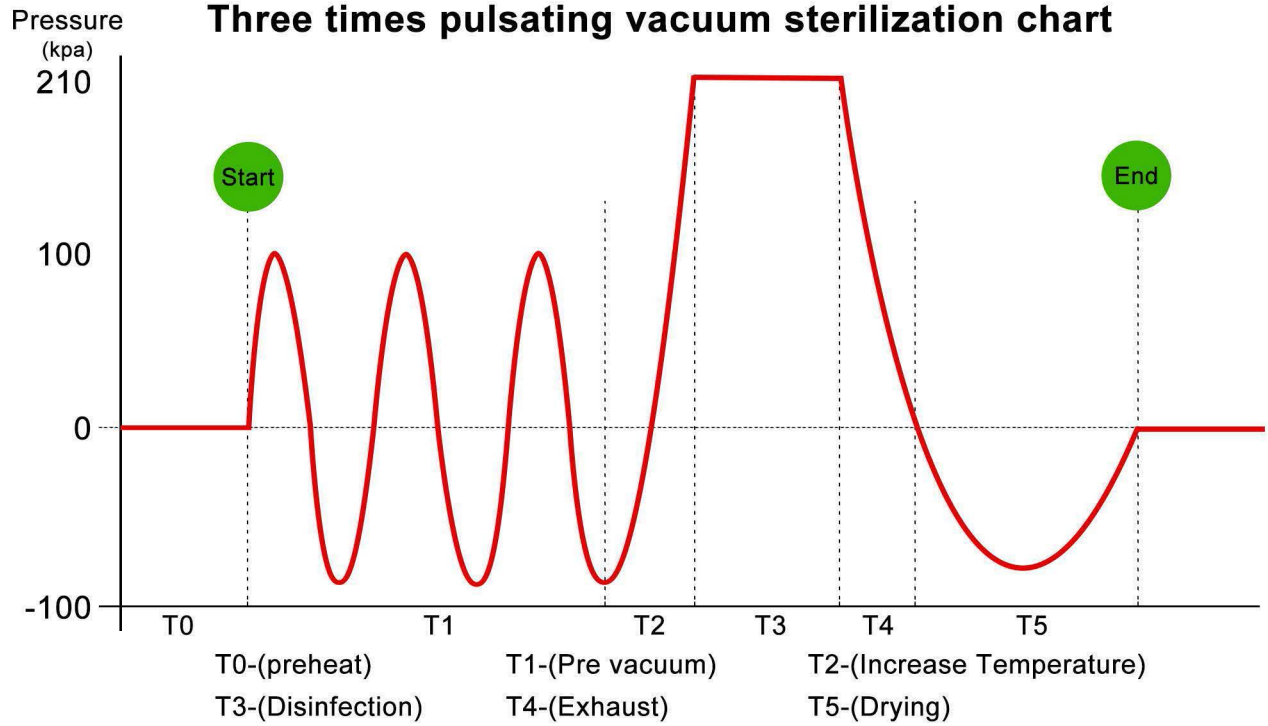

PROG	Temperature(℃)	Pressure(KPA)	Time(min)
Unwrapped	134	210	4-20
Unwrapped	121	110	15-30
wrapped	134	210	4-20
Unwrapped	121	110	15-30
Cotton	121	110	15-30
plastic	121	110	15-30
B&D test	134	210	3.5
Vacuum test	-	-	10

CLASS B

AUTOCLAVE



B class performance

vacuum pump is used for pre vacuum air removal and post-vacuum drying



Top quality stainless steel

-Durable 304 stainless steel electro-polished chamber made long lasting autoclave
-stainless steel door with mirror polish surface is highly resistance to corrosion.

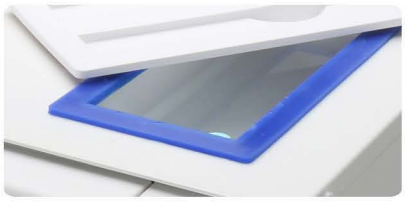

Convenient

Open type top water tank designed to easily filling water and clean the tank.



Safety

Cycle will not start if the door is not locked.
Door will not open at the end of cycle until chamber pressure equalizes to room pressure.



Big capacity

Circular support basket
Maximization of space utilization
Three layer trays



Thermal printer

Optional high quality built-in thermal printer for paper printouts